

CS-LZ25TKE + CU-LZ25TKE




Framtiden är nu
Grön, energisnål och ren
Värmepumpar för ditt hem

[JÄMFÖR LÖSNINGAR?](#)

Upptäck den senaste generationen värmepumpsystem

Panasonic Comfort Cloud App. Smart centraliserad styrning

[LÄS MER](#)

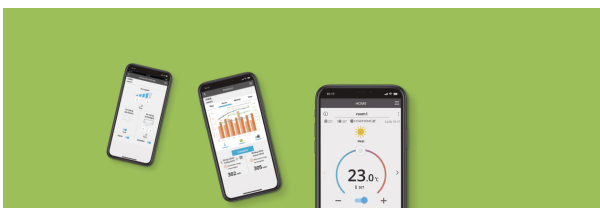



Ny röststyrning

Kontroll utan gränser och få handsfree-hjälp för att fullt ut få tillgång till funktionerna i dina värmepumpar.

[LÄS MER](#)



Vill du bli kontaktad av en installatör för en uppskattning och offert på vad det skulle kosta att installera en luft/luft värmepump i ditt hem?

Klicka nedan och fyll formuläret så hjälper vi dig att välja ut rätt luft/luftvärmepump för hemmet. Vårt installatörsnät för luftvärmepumpar täcker stora delar av landet och våra installatörer lämnar gärna offert på både installation och värmepump.

Kontakta oss för att sänka dina kostnader redan idag!

[KONTAKTA OSS](#)

LZ Retro Fit 249 Inverter+ - R32		2.50 kW
Maximum capacity	kW	6,55
Reference		CS-LZ25TKE + CU-LZ25TKE
Heating capacity (Nominal)	kW	3,20
Heating capacity (Min)	kW	0,85
Heating capacity (Max)	kW	6,55
COP (1)	W/W	5,12
Heating capacity at -7°C (2)	kW	4,00
COP at -7°C (1)	W/W	2,52
Heating capacity at -15°C (2)	kW	3,90
COP at -15°C (1)	W/W	2,27
Heating capacity at -20°C (2)	kW	3,30
COP at -20°C (1)	W/W	2,04
Heating capacity at -25°C (2)	kW	2,70
COP at -25°C (1)	W/W	1,83
SCOP (3)		5,00 A++
SCOP tested by 3rd party laboratory DTI		5,17 * A+++ **
Pdesign at -10°C	kW	3,00
Input power heating (Nominal)	kW	0,63
Input power heating (Min)	kW	0,17
Input power heating (Max)	kW	1,77
Annual energy consumption heating (4)	kWh/a	840
Cooling capacity (Nominal)	kW	2,50
Cooling capacity (Min)	kW	0,85
Cooling capacity (Max)	kW	3,00
SEER (3)		7,60 A++
Pdesign (cooling)	kW	2,50

LZ Retro Fit 249 Inverter+ - R32		
		2.50 kW
Input power cooling (Nominal)	kW	0,51
Input power cooling (Min)	kW	0,17
Input power cooling (Max)	kW	0,70
Annual energy consumption cooling (4)	kWh/a	115
Indoor unit		CS-LZ25TKE
Indoor power source	V	230
Indoor air flow (Heat)	m ³ /min	12,5
Indoor air flow (Cool)	m ³ /min	9,3
Moisture removal volume	L/h	1,5
Indoor sound pressure (Heat -Hi) (5)	dB(A)	45
Indoor sound pressure (Heat -Lo) (5)	dB(A)	29
Indoor sound pressure (Heat -Q-Lo) (5)	dB(A)	18
Indoor sound pressure (Cool -Hi) (5)	dB(A)	40
Indoor sound pressure (Cool -Lo) (5)	dB(A)	25
Indoor sound pressure (Cool -Q-Lo) (5)	dB(A)	21
Indoor dimension (Height)	mm	249
Indoor dimension (Width)	mm	790
Indoor dimension (Depth)	mm	355
Indoor net weight	kg	11
Outdoor unit		CU-LZ25TKE
Outdoor air flow (Heat)	m ³ /min	34,0
Outdoor air flow (Cool)	m ³ /min	33,1
Outdoor sound pressure (Heat -Hi) (5)	dB(A)	44
Outdoor sound pressure (Cool -Hi) (5)	dB(A)	43

LZ Retro Fit 249 Inverter+ - R32		2.50 kW
Outdoor dimension (Height) (6)	mm	622
Outdoor dimension (Width) (6)	mm	824
Outdoor dimension (Depth) (6)	mm	299
Outdoor net weight	kg	38
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 20
Elevation difference (in/out) (7)	m	10
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	20
Refrigerant (R32) / CO2 Eq.	kg / T	1,10 / 0,743
Operating range (Heat - Min)	°C	-20
Operating range (Heat - Max)	°C	+24
Operating range (Cool - Min)	°C	-15
Operating range (Cool - Max)	°C	+43
Lowest outdoor temperature tested by 3rd party laboratory (8)	°C	-35

Kompletterande produkter